



# COF Test & Results

- M10 X 1.5 X 40 Wilson Garner 9.8 plain test bolt
- Zinc plated washer
- Rundown: 30 RPM / tightening: 30 RPM
- Shut off value: 50 NM
- NyShield® with torque modifier applied

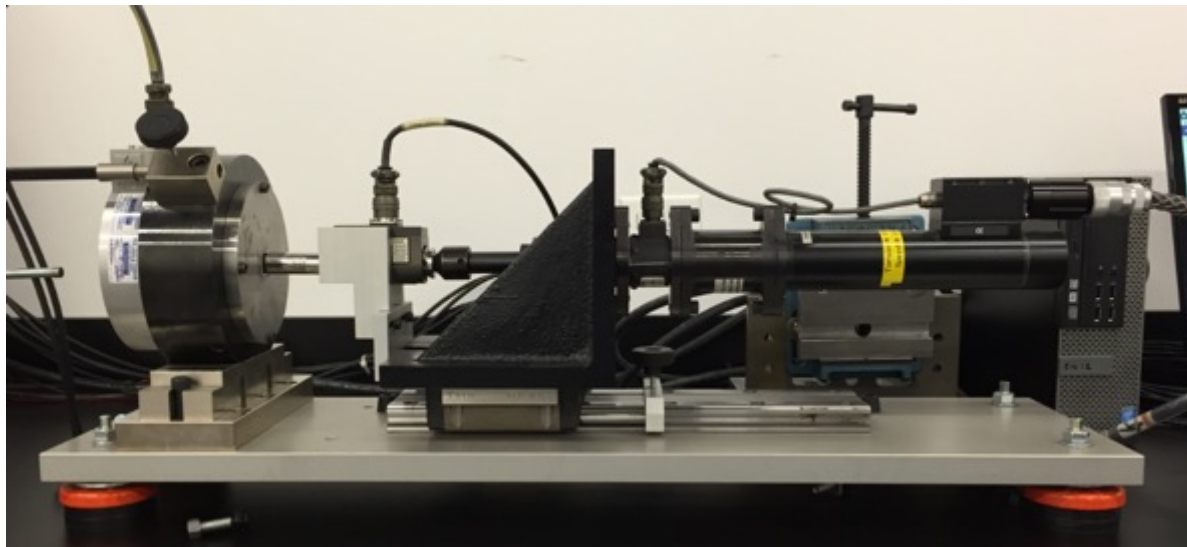

COF testing performed on RS torque tension equipment

Total COF Values for 30 Samples

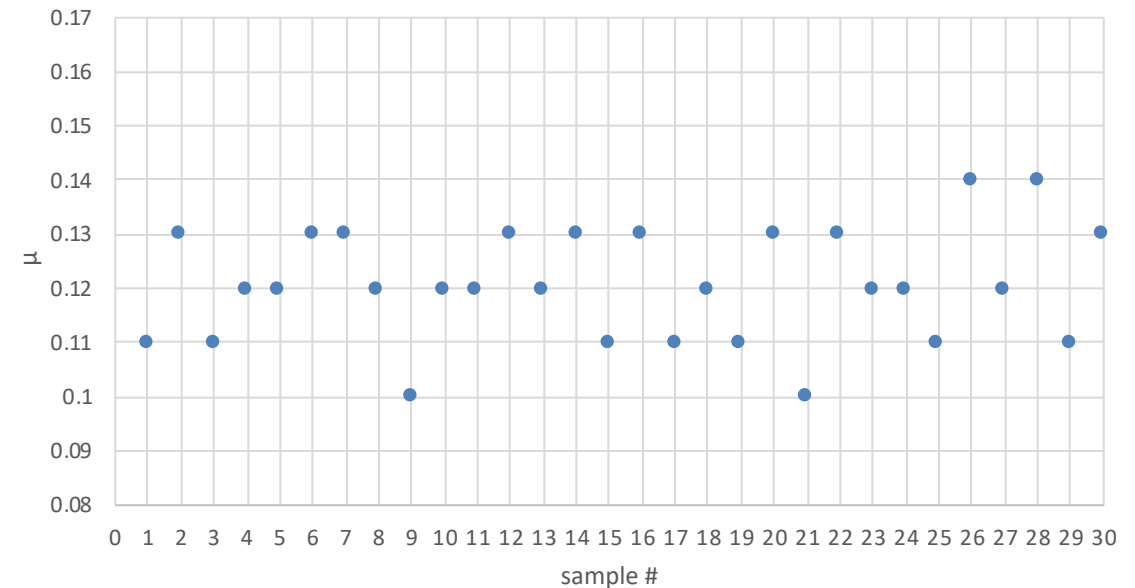

Coefficient of friction values are able to be adjusted as necessary (typical range of +/- 0.03).