

**NySeal<sup>®</sup> 2.0**  
*The King of Under Head Sealants*



## NySeal<sup>®</sup> 2.0 Product Overview




A Marmor/Berkshire Hathaway Company

- # 5 Fortune 500 List
  - Financially Stable
- Aggressive Investment Strategy
  - Seeking Growth Partners
- Decentralized Culture
  - Close to Customer



- Warren Buffett  
Chairman and CEO Berkshire Hathaway

# Global Support Network

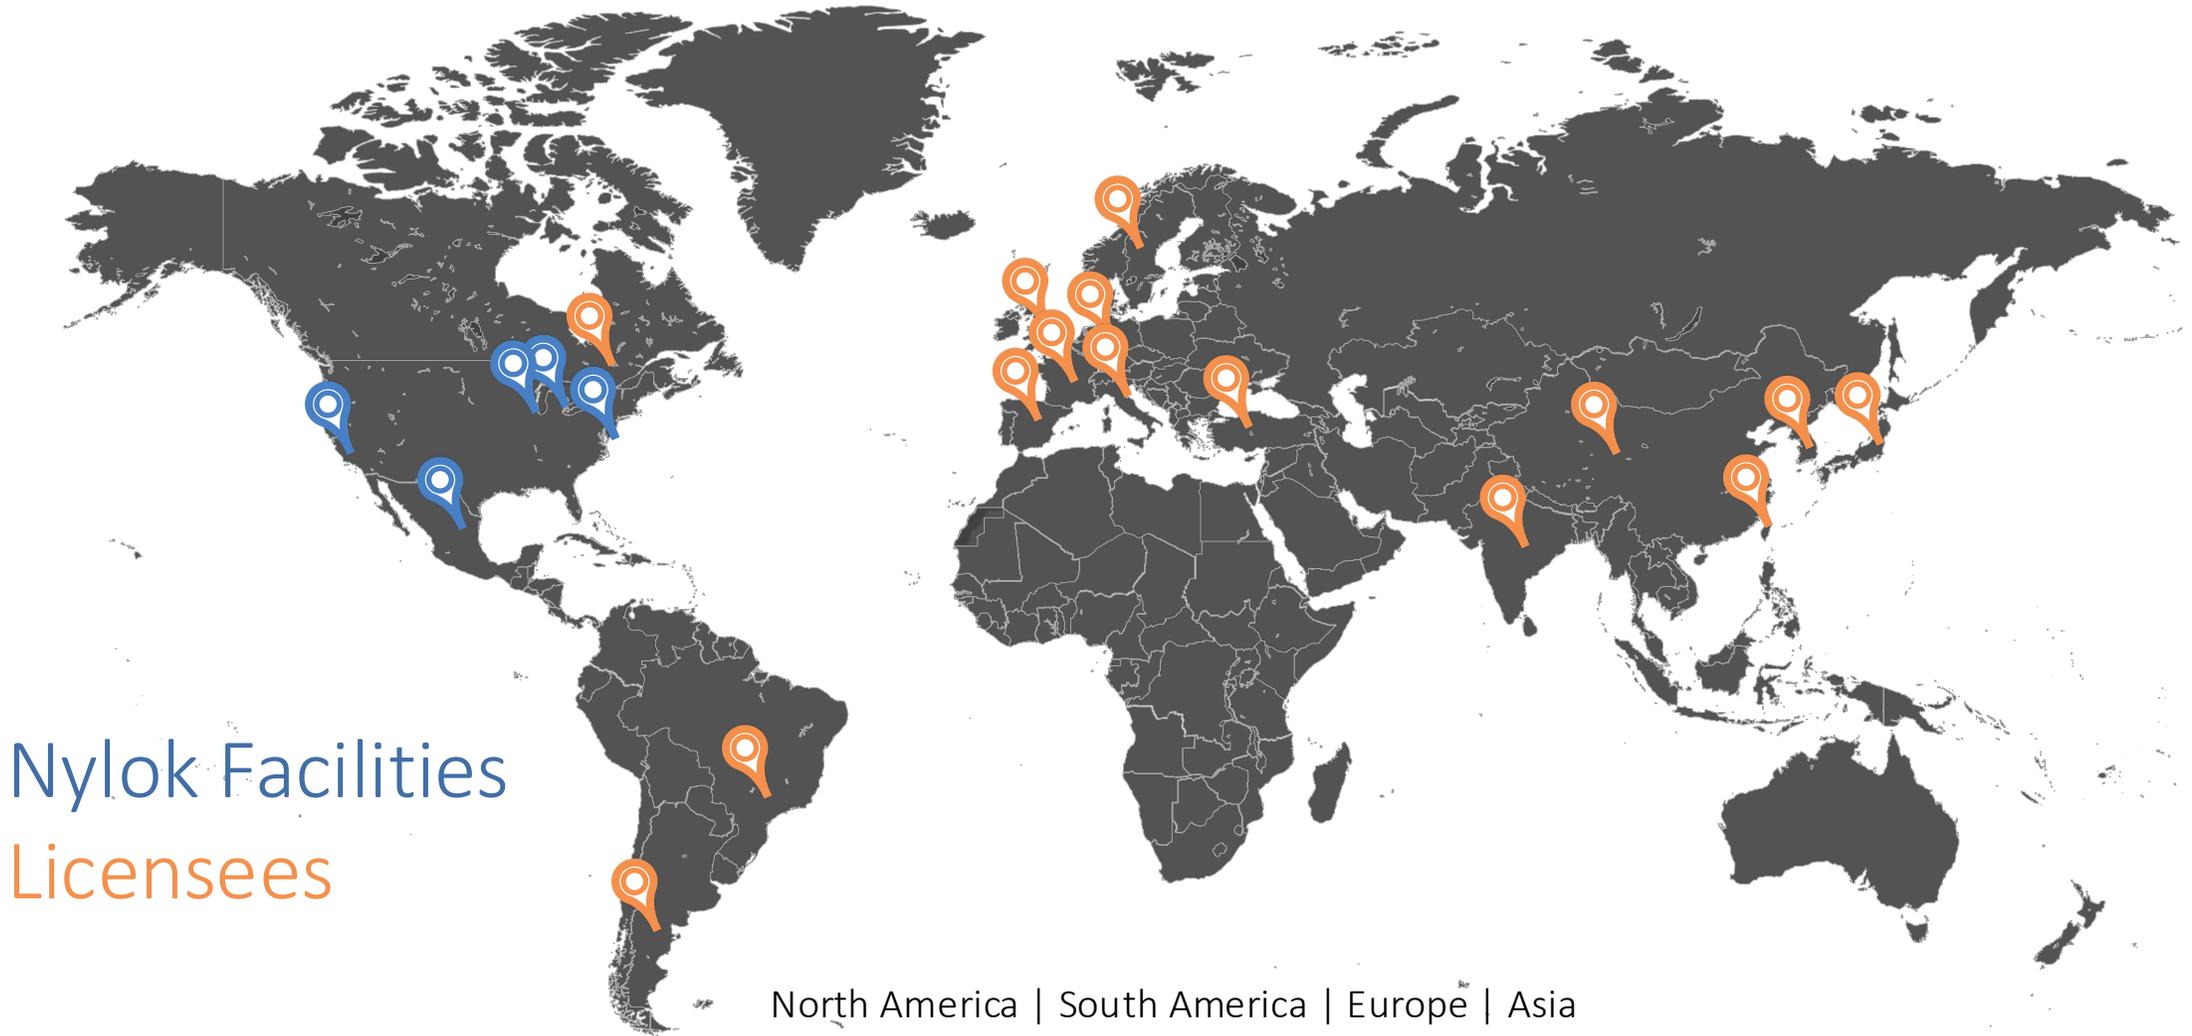

Nylok Facilities  
Licensees

CONFIDENTIAL

# Who We Are & The Role We Play



- *First* and *largest* fully dedicated processor of self locking products in the world
  - Proven history of solving customer fastener issues for over *75 years*



Mission & Vision:

*Developing* Innovative Fastening Solutions Globally by *Engineering* Processes and *Formulating* Products



# Product Overview



## LOCKING

Mechanical Reusable



precote®



## SEALING



NySeal® 2.0  
The King of Under Head Sealants

NEW  
Reusable



## ASSEMBLY AIDS




A Marmon/Berkshire Hathaway Company

## PROTECTION




NEW



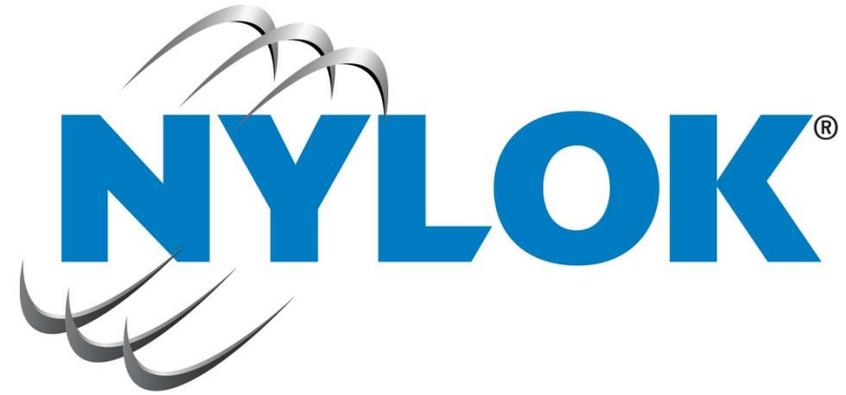

# Next Level Durability Under – The – Head Sealant

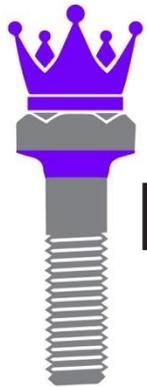

**NySeal<sup>®</sup> 2.0**

*The King of Under Head Sealants*



A Marmon/Berkshire Hathaway Company

# NySeal<sup>®</sup> 2.0



## Wish List:

- No peeling off
- Reusability (up to 5 times)
- Performs after exposure to -60 to 150°C
- Low clamp load loss at RT



# Other Sealant Solutions

## Issues

- Distort
- Squeeze out of joint
- Outgas (peroxides and / or sulfur)
- Difficult tightening strategy (cannot tighten to a torque)
- Not good for multiple installations



# NySeal<sup>®</sup> 2.0 is a Durable Under Head Sealant



- Each of these M6 fasteners were tightened once to 9.5 Nm



Standard Silicone Sealant



Notice:  
No Tearing  
or Debris!




# Why NySeal<sup>®</sup> 2.0 is More Durable than Standard Sealants?



- ber Properties
- ber Specifications
- ber Temperature Range
- ber Hardness Chart
- ig Groove Design
- ig Size Chart
- ber Chemical Resistance
- ig Installation Guide

First, if you need a rubber or other durometer with force and a hardness scale, refer to our rubber hardness chart below, which puts Shore 70A. A rubber durometer of Shore 70A is the most commonly chosen material hardness for all applications.


- Shore 20A = Rubber Band
- Shore 40A = Pencil Eraser
- Shore 60A = Car Tire Tread
- Shore 70A = Running Shoe Sole
- Shore 80A = Leather Belt
- Shore 100A = Shopping Cart Wheel

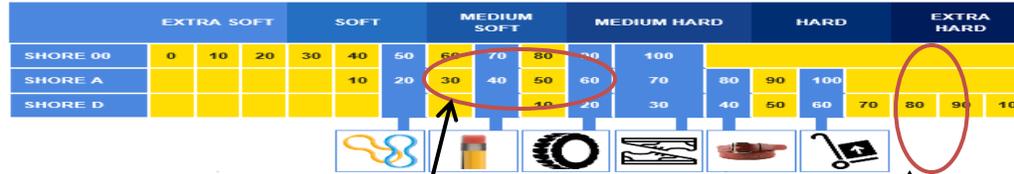

	Competitive Under Head Sealants	NySeal <sup>®</sup> 2.0
Hardness	45-65 Shore A	62 Shore D*
Tensile Strength	145 PSI (1 MPa)	2300 PSI (15.9 MPa)
Elongation	400%	40%
Modulus	145 PSI (1 MPa)	31,000 PSI (214 MPa)

\* 62 Shore D is 100+ on Shore A Hardness Scale

M10 Fastener

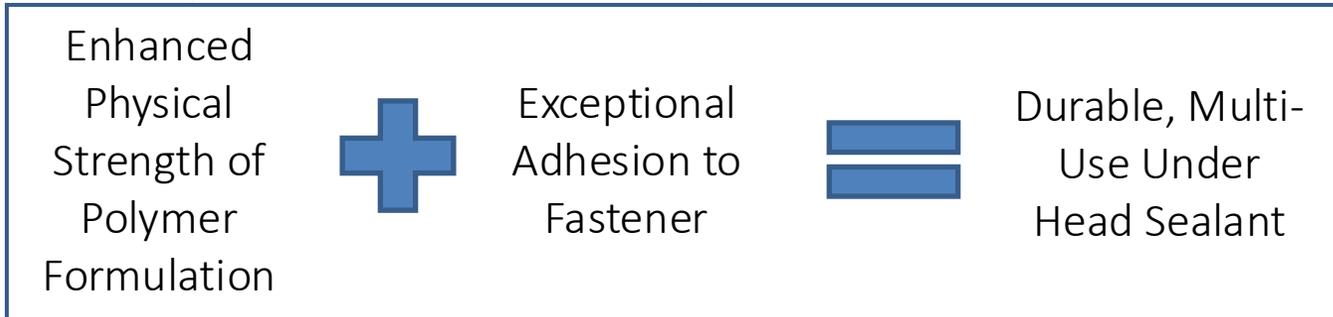

# Better Under Head Sealant - NySeal® 2.0



- Nylok released NySeal® 2.0 in 2019 - Today, we would like to explain its strengths and tested abilities
  - Pressurized seal testing – M3 fasteners
  - Automotive fluid testing with engine plugs
  - NySeal® 2.0 Chemical resistance
  - Mechanical performance and SAEJ200 results for NySeal® 2.0




# Sealing Tests – Apparatus for M3's



- Pressurized & Vacuum Leak Testing
  - Per GMW14906 & FCA PF.90078 Specifications
  - Under water – look for bubbles
  - Before and after thermal cycling

Five test bolt/sealant assemblies tested at a time

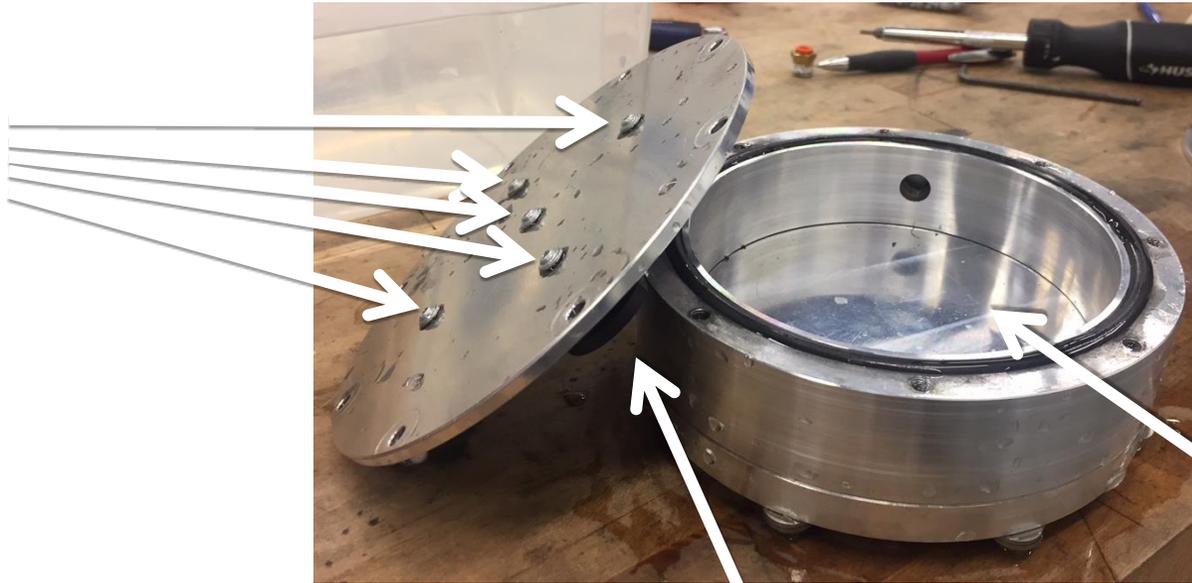



Test fasteners were installed into plastic boss on back side of plate for this test

M3 Fasteners



Inside chamber, once sealed with cover, is pressurized

# Sealing Tests – Apparatus for M3's

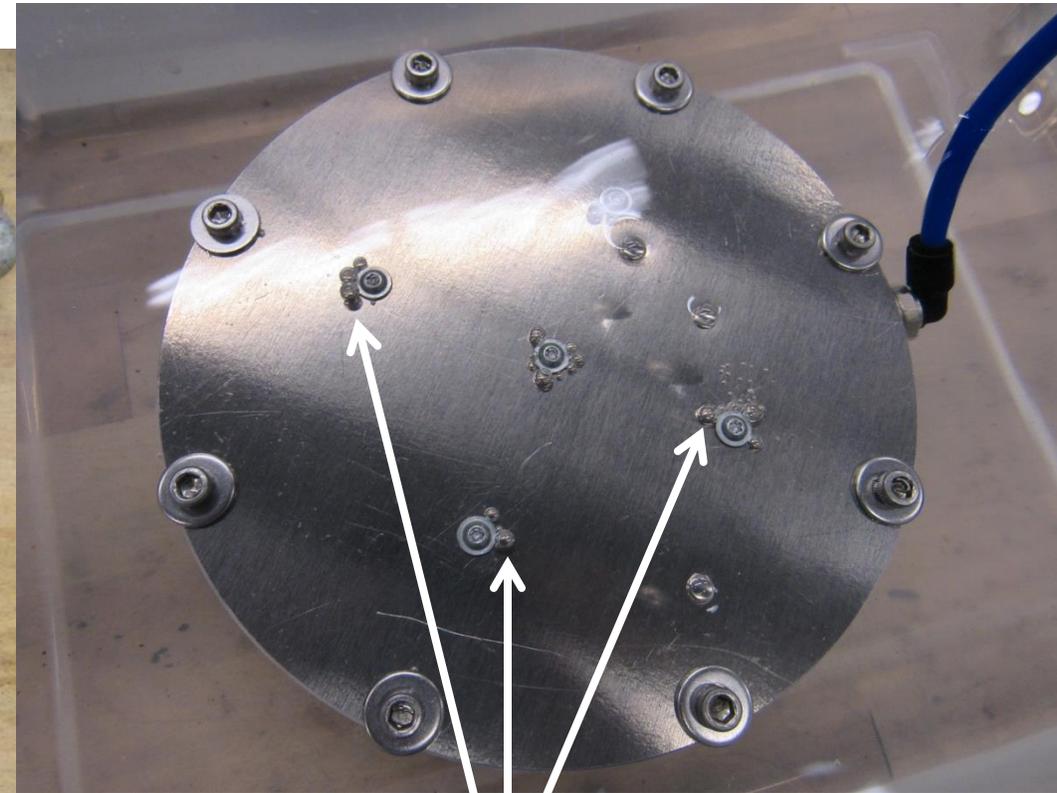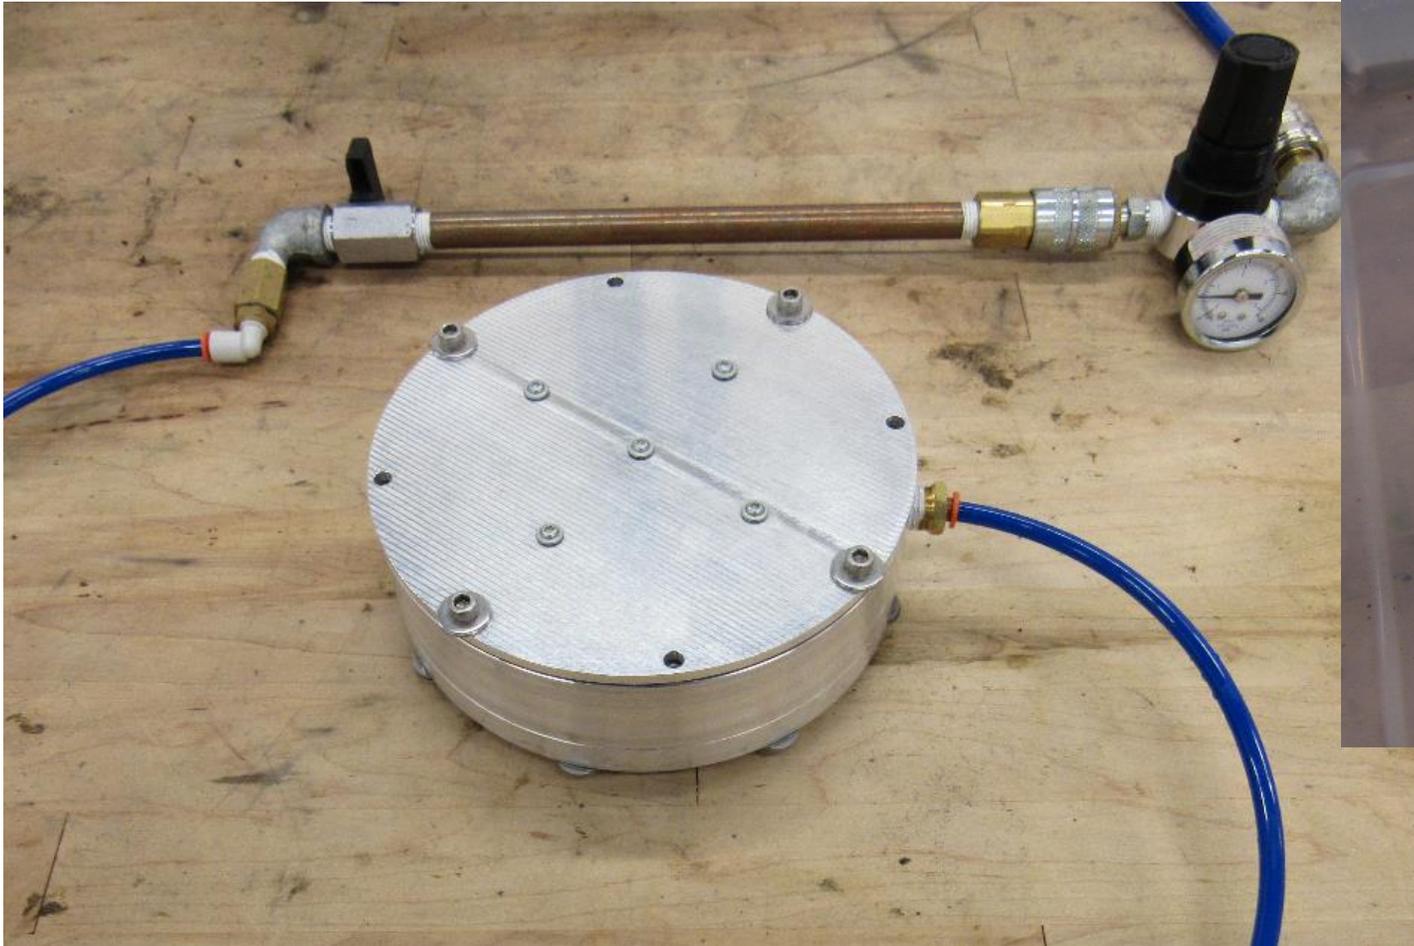

Bubbles near the screw heads demonstrate **failure** on **control** samples (no sealant)

Tested at 68.9 kPa (10 PSI) typical

# Sealing Tests for M3 Fasteners




TER  
LATION)  
ETAL  
SS  
ERIAL)  
TION  
NTACT  
SURES  
ENTS)

## ✓ TESTING PERFORMED IN NYLOK LAB

- **FCA PF.90078 5.2.1** Sealing Requirement – Submergence (5.2 kPa (0.75 PSI) at RT for 60 sec) ✓ **PASS**
- **GMW14906 4.5.4.3** Pressurization Seal Test (Under 2.5cm water, pressurize to 7 kPa (1 PSI) for 5 min) ✓ **PASS**
- **FCA PF.90078 5.22** Sealant pressure test to failure (passes at pressures up to 68.9 kPa (10 PSI) following GMW14906 4.5.4.3 protocol) ✓ **PASS**
- **GMW14906 4.5.4.1** Vacuum Seal Test (-21.0 kPa (-3 PSI), under water for 15 sec) ✓ **PASS**
- **GMW 14906 4.9.2.12** Storage (must pass above pressure and vacuum tests after exposure below): ✓ **PASS**

Cycle	Temperature	Duration
1	80°C ± 3°C	48 h
	Ambient 23°C ± 3°C	≥ 15 min
2	-40°C ± 3°C	24 h
	Ambient 23°C ± 3°C	≥ 15 min

- **GMW 14906 4.9.2.12.2** Rapid Thermal Transition (must pass above pressure and vacuum tests after exposure to rapid transition between -60°C and 85°C) ✓ **PASS**
- **FCA PF.90078 5.15** Shipping/Storage Temperature Tests (must pass FCA PF.90078 5.2.1 after thermal cycling between -40°C and 80°C) ✓ **PASS**
- **CHEMICAL RESISTANCE TESTING:** ✓ **PASSES** 24 hr

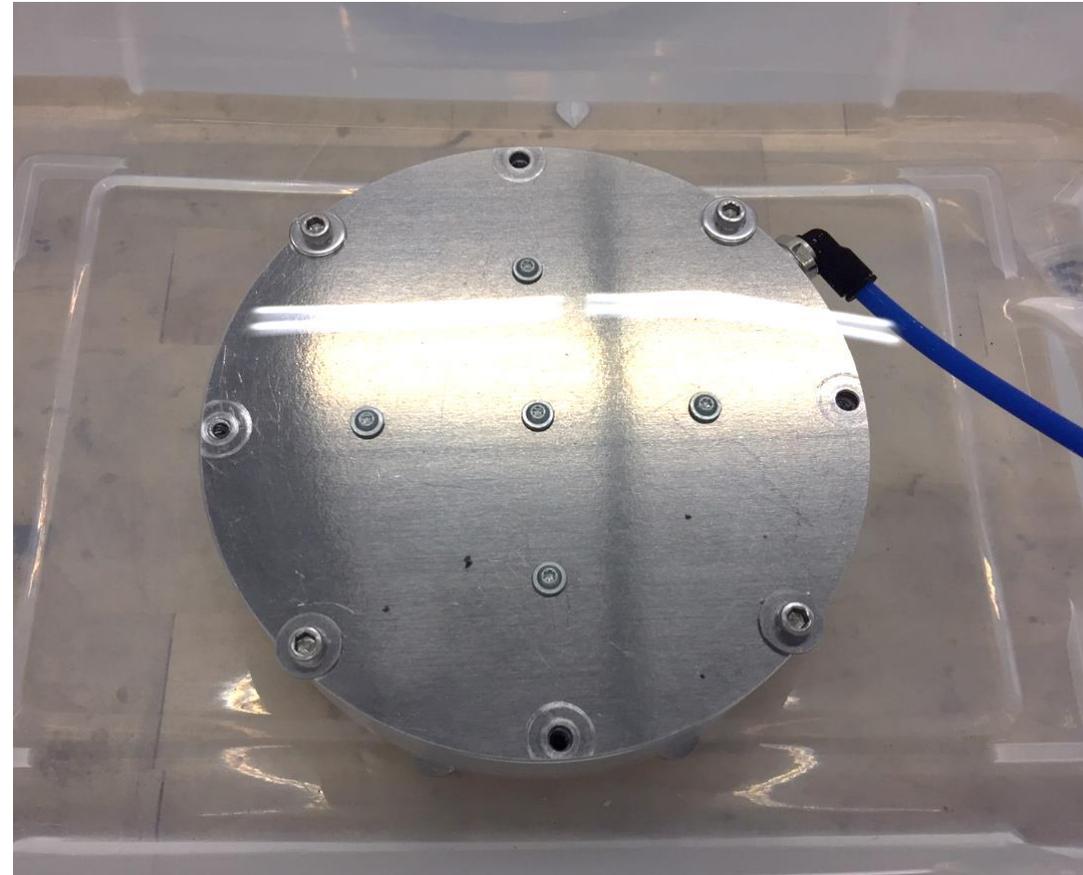


Submerged Pressurization Test – Demonstrates a “Passing” Test

# Sealing Tests – Vacuum



Submerged Vacuum Test

- Vacuum test at -21 kPa (-3.0 PSI) vacuum for 15 seconds **✓PASS**

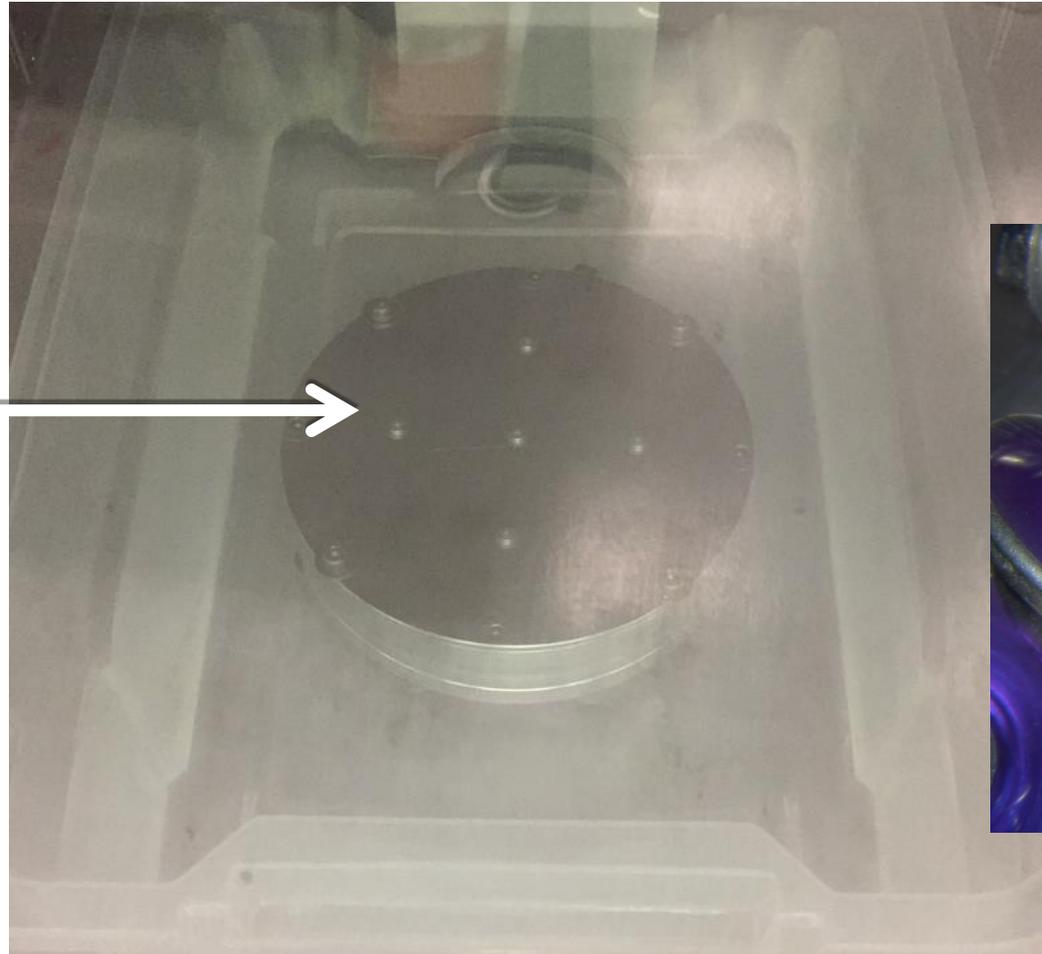

M3 Fasteners




Vacuum Chamber Test

# Sealing Tests – Rapid Thermal Transition



- Samples must pass both pressurization and vacuum tests before and after rapid thermal cycling
  - NySeal® 2.0 ✓ **PASS**

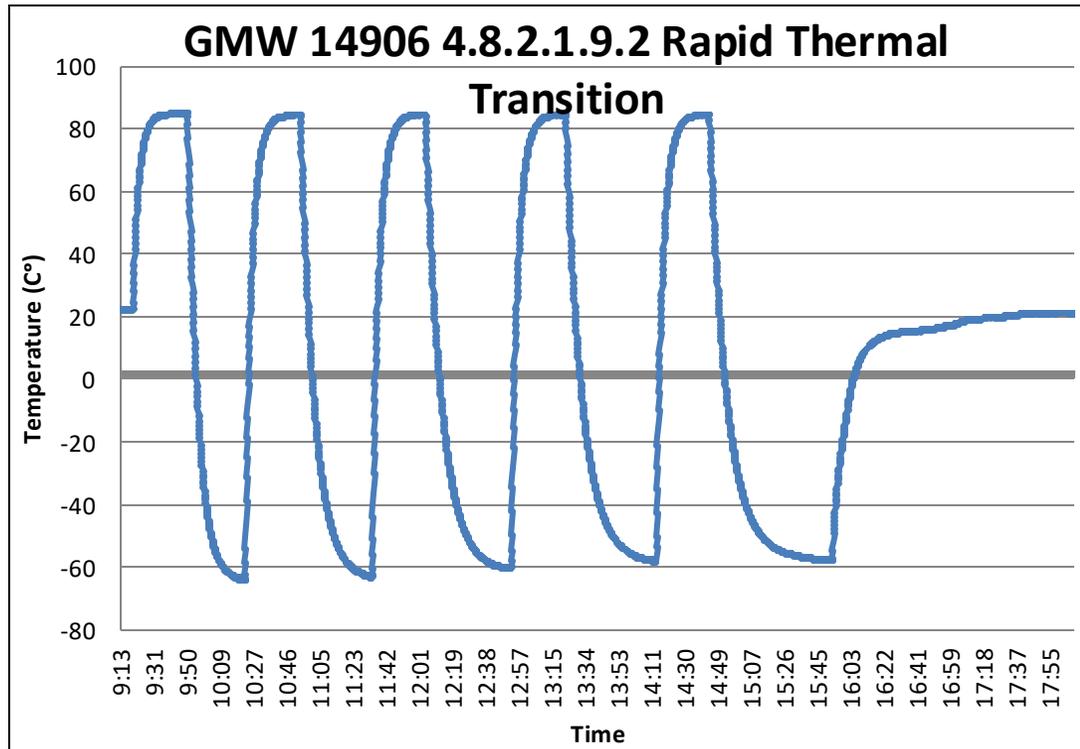

Temperature Cycling Profile



Fastener/test plate assembly at -60C

# High Pressure Spray Test



- Elevated Test parts assembled into a plastic boss with color changing paper




# High Pressure Spray Test




- Elevated Results showing water indicating paper and multiple installations

## High Pressure Spray Test\*

- Parts with Sealant Mounted to Seal Plate
- Sprayed by Pressure Washer with 76 Bar (1100 psi) at 14 liters/minute for 3 minutes

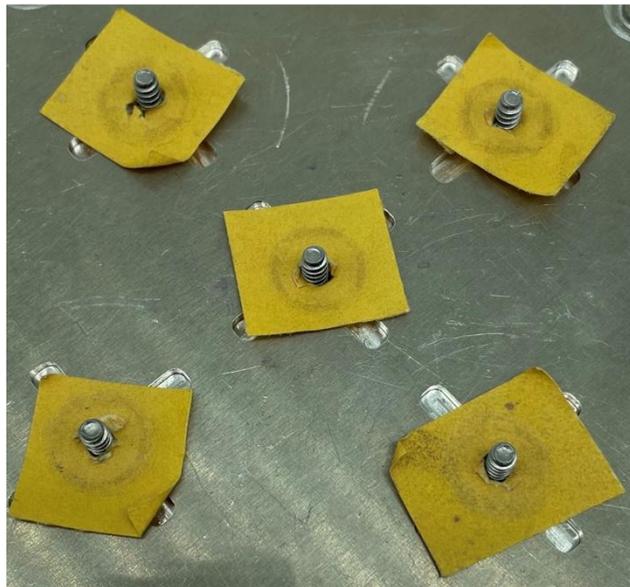

**NySeal® 2.0**  
After 25 Installations

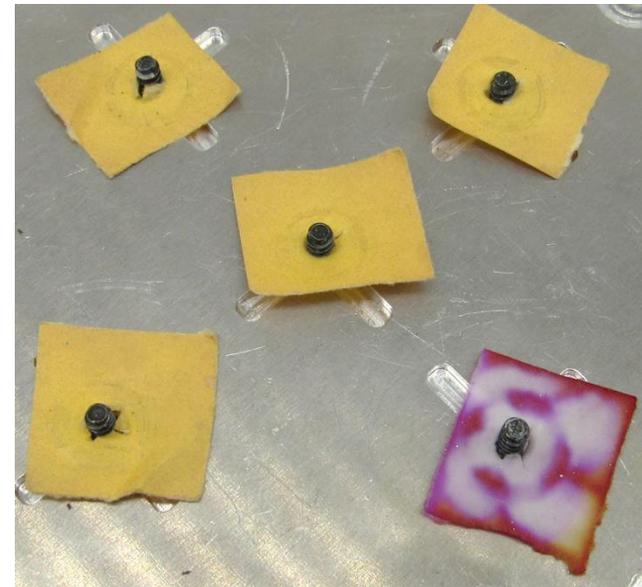


**Alternative OEM Approved Sealant**  
After 2 Installations

Delta 40 x 12mm Torx Plus Rnd Screw  
Finish: black zinc electroplate\*\*

# Sealing Test – Engine Plug



- Automotive fluid testing: pressurized while being exposed to an elevated temperature for a 5-hour duration

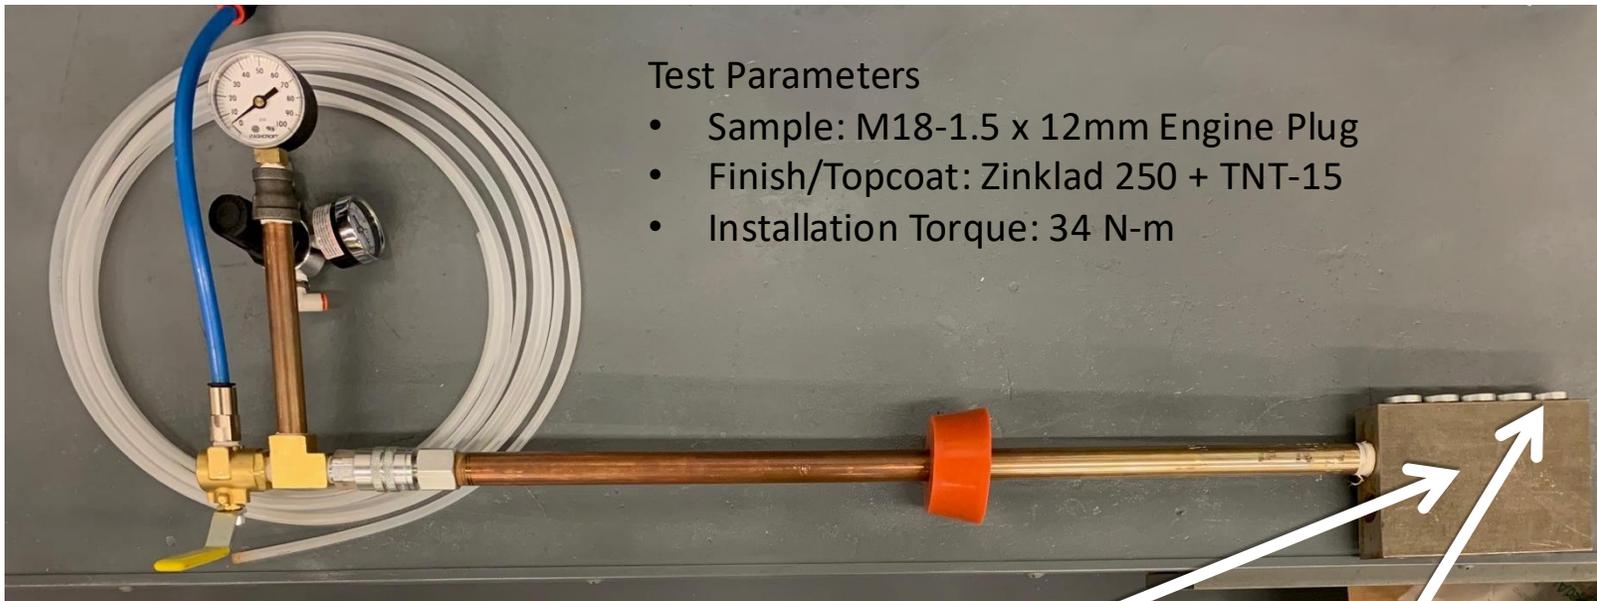

### Test Parameters

- Sample: M18-1.5 x 12mm Engine Plug
- Finish/Topcoat: Zinklاد 250 + TNT-15
- Installation Torque: 34 N-m

Test block

Fasteners under test



Control

- Bolt without sealant
- Shows a failed test
- Green tracer added to test fluid
- Tracer is visible under black light illumination

\* Tested per Ford WSS-M21P27

# Sealing Tests – Engine Plug



## Test Results\*

- Coolant/Antifreeze Resistance (120C for 5 hours @ 2 bar) ✓PASS
- Engine Oil Resistance (SAE 10W30 @ 160C for 5 hours @ 4 bar) ✓PASS
- Automatic Transmission Fluid Resistance (Ford ATF service fluid @ 120C for 5 hours @ 4 bar) ✓PASS
- Fuel Resistance (commercially available gasoline @ 70C for 5 hours @ 4 bar) (not tested yet) ✓PASS



M18 Fastener Used for All Testing  
Zinklاد 250 + TNT-15

\* Tested per Ford WSS-M21P27

# Sealing Tests – Engine Plug



- Elevated Temperature with Automotive Fluid Testing\*

## Test Results:

- Engine Oil Resistance (SAE 10W30 @ 150°C for **168 hours** @ 4 bar)

✓ **PASS**



\* Tested per Ford WSS-M21P27

# Chemical Resistance



- NySeal®2.0 is unaffected and still seals in standard sealing tests after 24 hrs of room temperature exposure to the following fluids: ✓PASS

- 50% methanol in water
- AutoZone 50/50 antifreeze and coolant
- AutoZone power steering fluid
- Black Magic No Scrub All Wheel Cleaner
- Castrol DEXRON VI Transmax Automatic Transmission Fluid
- Commercial Car Shampoo - Meguiar's® Car Shampoo
- Commercial Glass Treatment Agent - Rain-X 2-in-1 Glass Cleaner
- Commercial Paintwork Cleaning Product - P21S Paintwork Cleanser
- Commercial Tar and Road Oil Cleaner - Turtle Wax Bug and Tar Remover


- Commercial Vehicle Cleaning Agent - Simple Green Cleaner
- Commercial Washer Fluid - AutoZone Windshield Washer Fluid
- Commercial Window Cleaning Agent: Windex®
- Deionized Water from Nalco Filters

# Properties - COF



- Coefficient of friction values are controlled within normal COF specifications, even after multiple installations. COF values can be adjusted per customer needs.

### Coefficient of Friction vs Number of Installs

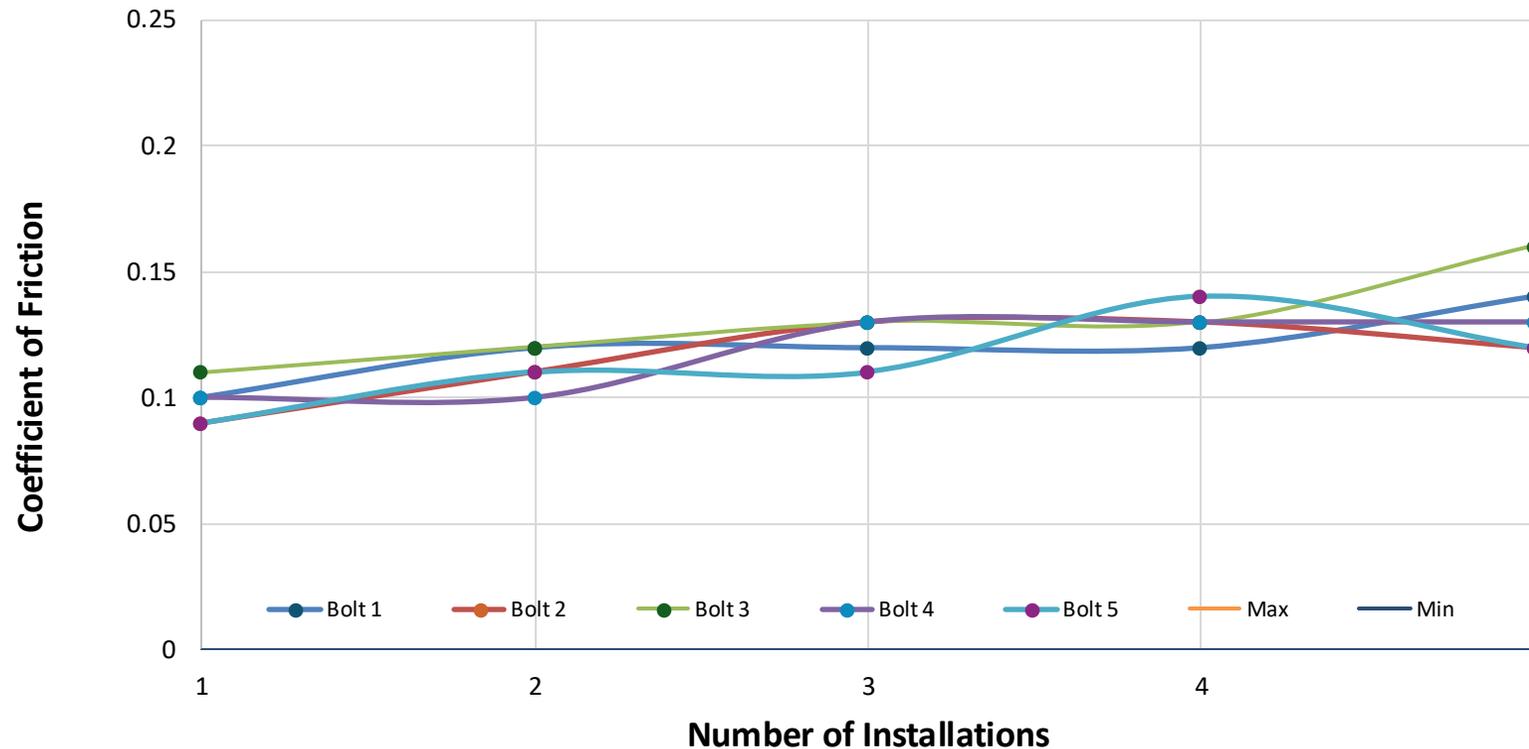


- Size: M10 x 1.5mm x 45mm
- Finish: Electroplated Zn Ni
- Tightened against Zn Ni finish on washer

# Low Clamp Load Loss



- Average Clamp Load Loss over 48 Hours for M8 Fastener: 7.5% (same fastener w/o any sealant had 5.1% clamp load loss over same time frame)

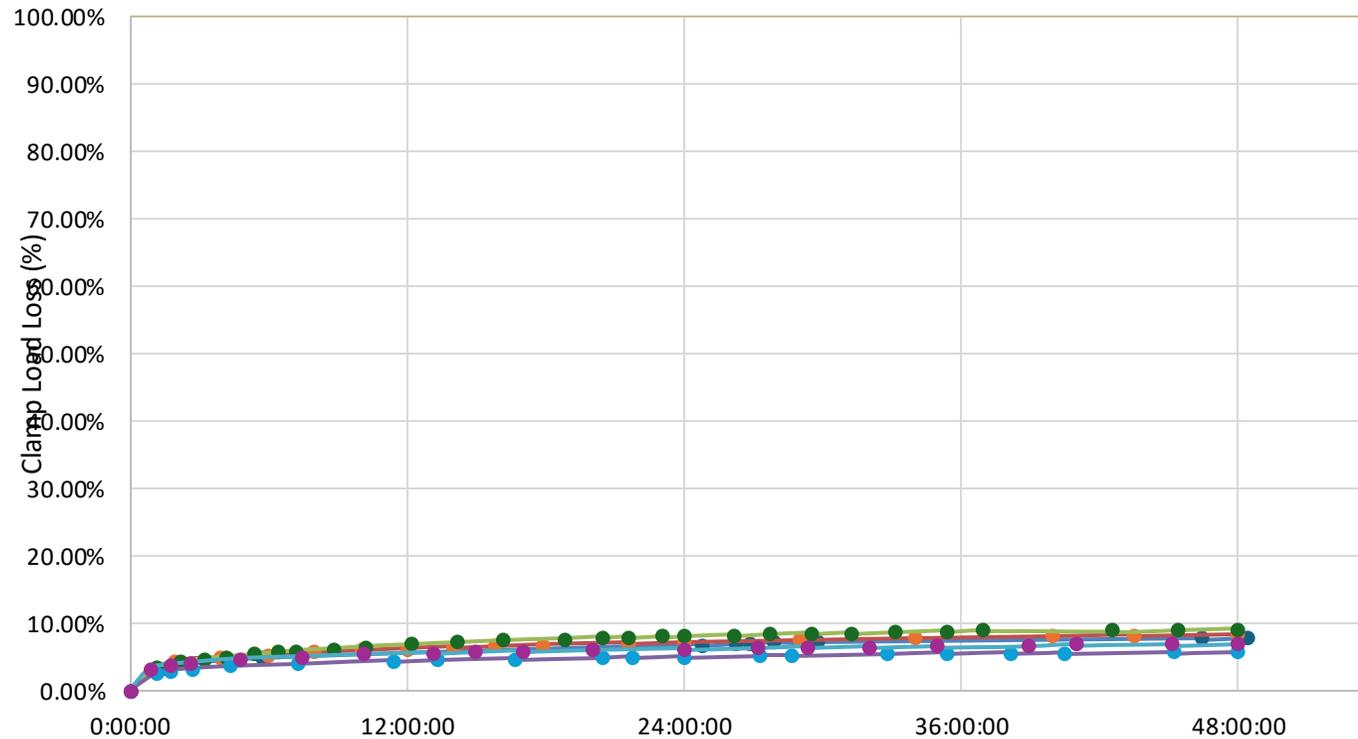

# Larger Fasteners Also Benefit From NySeal<sup>®</sup> 2.0



*Electroplated Zinc Nickel Finish*



Sample Before Testing

*Electroplated Zinc Nickel Finish*



Sample After 5 Installs

Effects of multiple installations on M10 bolt tightened 5 times at 58 Nm tightening torque.


# SAE J200 – NySeal<sup>®</sup> 2.0 Temperature Performance




## Results:

- Test samples made from NySeal<sup>®</sup> 2.0 show no significant changes in physical properties, even after heat aging @100°C for 70 hrs.


Material Hardness Before/After Temp Soak

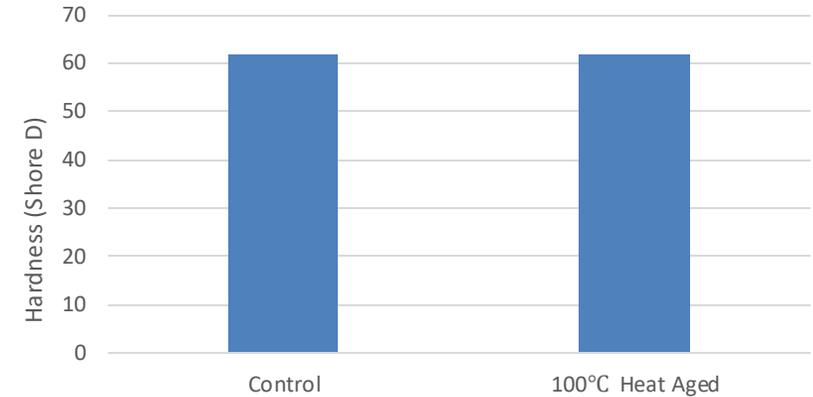


Tensile Strength Before/After Temp Soak

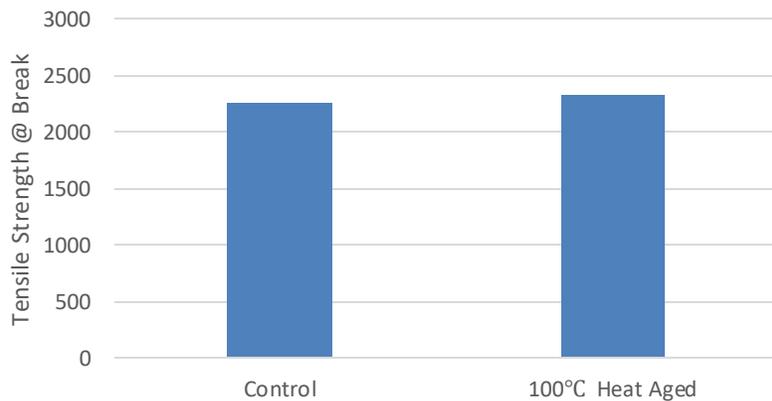

Modulus Before/After Temp Soak

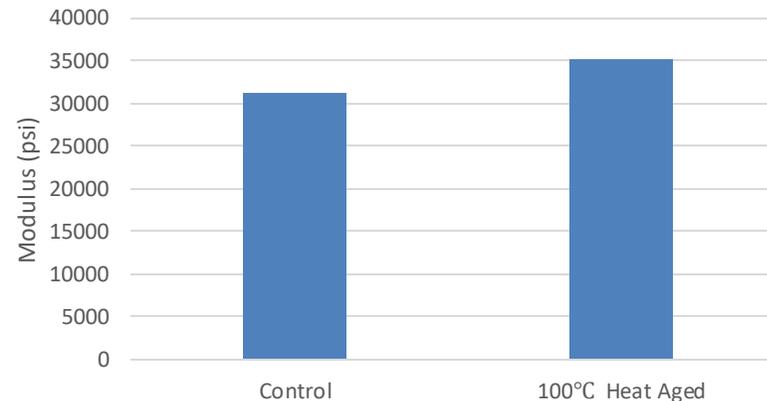

Elongation Before/After Temp Soak

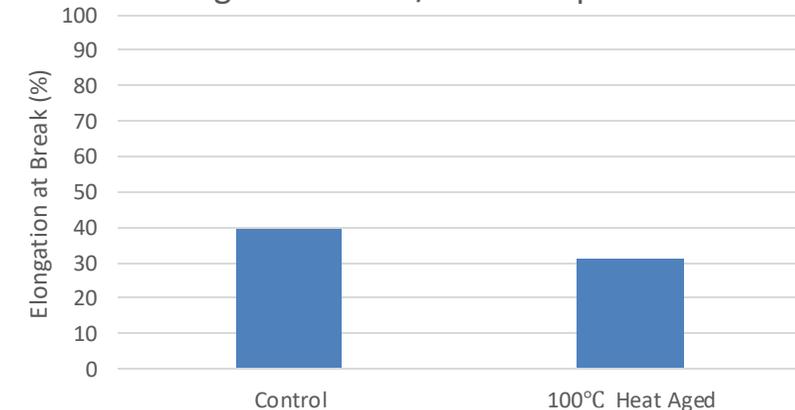


# SAE J200 – NySeal<sup>®</sup>2.0 Resistance to Oil Swell



## Results:

- Test samples made from NySeal<sup>®</sup>2.0 have low percentage swell (10 – 11%) when soaked in specified oil

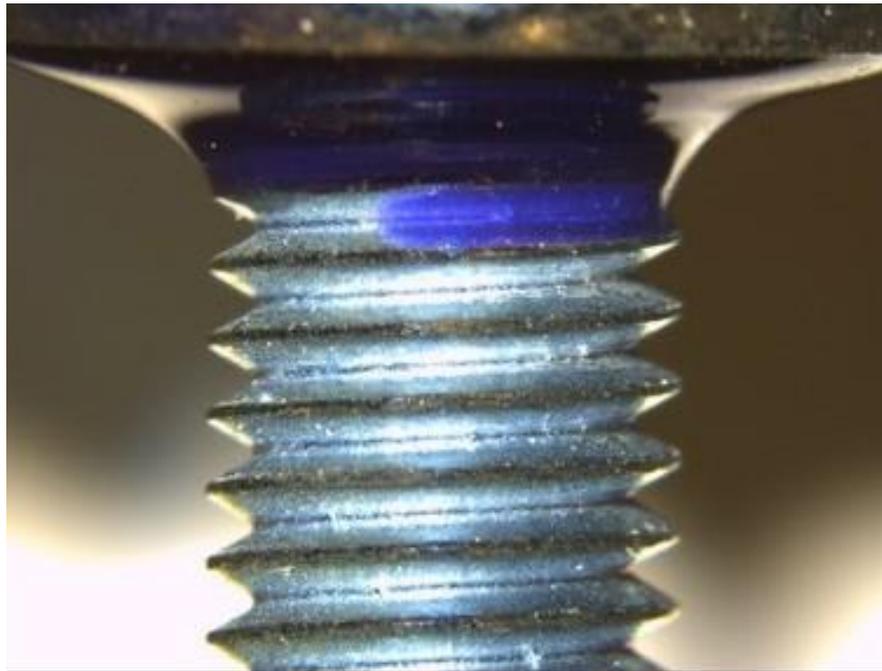

Before Oil Soak		After Oil Soak		%Change in Mass	% Change in Volume
Dry Mass (g)	Wet Mass (g)	Dry Mass (g)	Wet Mass (g)		
2.495	0.300	2.691	0.253	7.86%	11.07%
2.515	0.297	2.705	0.257	7.55%	10.37%
2.501	0.299	2.689	0.256	7.52%	10.49%
2.463	0.297	2.649	0.257	7.55%	10.43%
2.54	0.308	2.724	0.268	7.24%	10.04%


IRM 903 oil soak @ 100°C FOR 70HRS


# SAE J200 – NySeal<sup>®</sup>2.0 Call Out



## ■ SAEJ200M6BG910A14Z1Z2Z3Z4Z5Z6

- Z1: NYLOK<sup>®</sup> NYSEAL<sup>®</sup>2.0
- Z2: MATERIAL: POLYACRYLATE (PURPLE)
- Z3: HARDNESS: MEDIAN HARNESS 62 SHORE D (APPROX. 95 SHORE A) PER ASTM D2240
- Z4: VOLUME SWELL IN IRM 903 OIL AT 100°C FOR 70HRS: <15% PER ASTM D471
- Z5: ELONGATION: 30-50% PER ASTM D412
- Z6: MINIMUM TENSILE STRENGTH: 14MPA PER ASTM D412

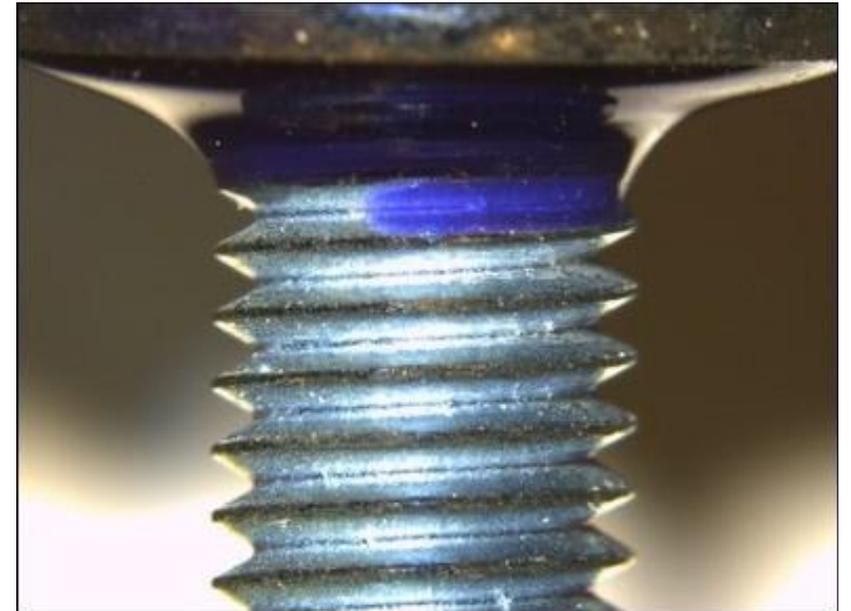

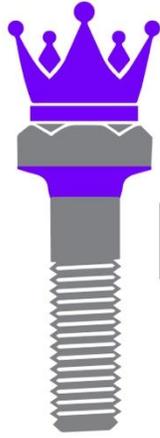

**NySeal<sup>®</sup> 2.0**  
*The King of Under Head Sealants*

Questions  
[sales@nylok.com](mailto:sales@nylok.com)

